
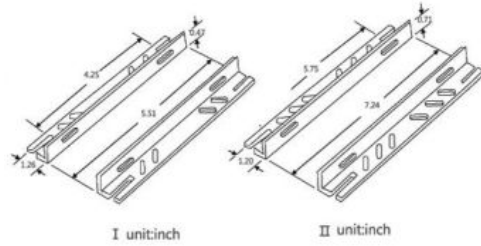


120/208/240/277/480V 60HZ
 US HID Magnetic Ballast
 HPS/MH[Aluminum Coil]
 120/208/240/277/480V 60HZ



Please refer to Figure II, when the power is above 175W. Other condition, refer to Figure I.

Ballast Model	Lamp Model	Input Voltage(V)	Circuit Type	Rated Power	Circuit Operating Current	Open Circuit Voltage	Power Factor	Size (inch)						(μF)Adapted Capacitor	weight kg	Insulation Class
								A	B	C	D	E	F			
HF-CWA MH175W.5T.A	M57	120/208/240/277/480V	CWA	175W	1.80/1.10/0.90/0.80/0.45A	305V	0.9	3.94	2.83	3.54	2.44	2.6	4.72	10μF /400V	3.3	H(180°)
HF-CWA MH250W.5T.A	M58	120/208/240/277/480V	CWA	250W	2.50/1.45/1.25/1.10/0.65A	300V	0.9	4.76	4.29	4.37	3.86	1.61	5.51	15μF /400V	4.1	H(180°)
HF-CWA MH400W.5T.A	M59	120/208/240/277/480V	CWA	400W	4.00/2.30/2.00/1.70/1.00A	300V	0.9	4.72	4.29	4.37	3.86	2.76	5.51	24μF /400V	5.3	H(180°)
HF-CWA MH1000W.5T.A	M47	120/208/240/277/480V	CWA	1000W	9.00/5.20/4.50/3.90/2.25A	425V	0.9	5.75	4.45	5.35	3.94	3.46	7.09	24μF /480V	9.8	H(180°)
HF-CWA MH1500W.5T.A	M48	120/208/240/277/480V	CWA	1500W	13.0/7.60/6.60/5.80/3.30A	450V	0.9	5.98	4.29	5.35	3.9	4.72	7.09	32μF /540V	12.6	H(180°)
HF-CWA HPS250W.5T.A	M154	120/208/240/277/480V	CWA	250W	2.70/1.56/1.35/1.17/0.68A	190V	0.9	4.76	4.29	4.37	3.86	2.17	5.51	35μF /300V	5.3	H(180°)
HF-CWA HPS400W.5T.A	M131	120/208/240/277/480V	CWA	400W	4.40/2.20/2.00/1.70/1.00A	190V	0.9	4.72	4.29	4.37	3.86	2.76	5.51	55μF /300V	6.5	H(180°)
HF-CWA HPS1000W.5T.A	M155	120/208/240/277/480V	CWA	1000W	9.00/5.30/4.50/3.90/2.25A	440V	0.9	5.98	4.29	5.35	3.9	4.33	7.09	26μF /525V	11.9	H(180°)