

Impedance ballasts for Fluorescent Lamps [EEI=B1]


Absolutely under the standards of GB19510.1, 19510.9 and IEC61347.

certificated by CCC、TUV、CE

Adaptable power: 15W-70W double-ended fluorescent lamp

Recommended lamp: GE、OSRAM double-ended T8 fluorescent lamp

Terminal: Push terminal/Screw terminal

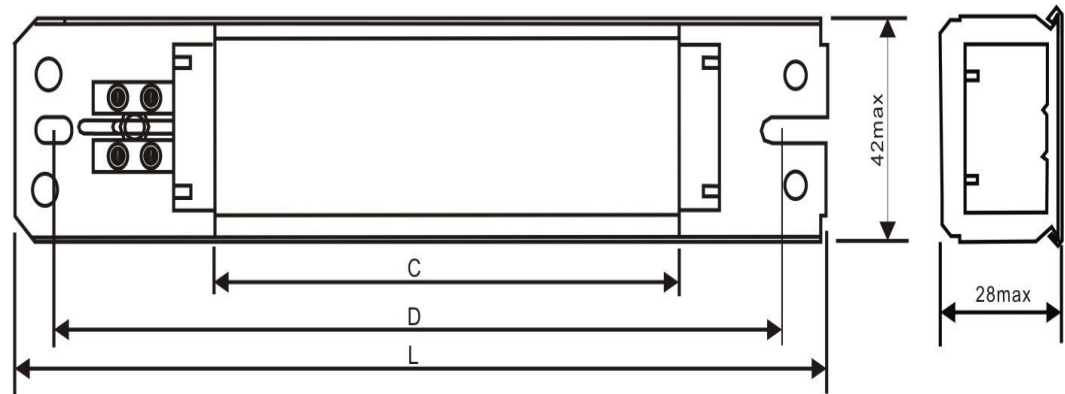

Model	(A) Current	(V) Voltage	(W) Lamp	Δt K	tw	EEI	Cp μ F	Weight (kg) Weight	Size (mm)			QTY/Carton	(mm) Carton Size
									a	b	c		
MB18/20	0.37	220V~ 240V 50Hz/60H	T8 18W/20W	55	130	B1	4.4	0.61	155	135	70	40	360*178*165
MB36	0.43	220V~ 240V 50Hz/60H	T8 36W	55	130	B1	4.4	0.61	155	135	70	40	360*178*165